

# B505001



- ▶ 主要技术特性 (Main Specifications)
- ▶ 适用导线规格 (Applicable wire) : --
- ▶ 适用基板厚度 (Applicable PC board thickness) : --
- ▶ 温度范围 (Temperature range) : -25°C ~ +85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 5A AC, DC
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.02 \Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M \Omega$
- ▶ 耐压 (Withstanding voltage) : 1500V AC/minute

## 材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A

## 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 

## HOUSING

B505001-2

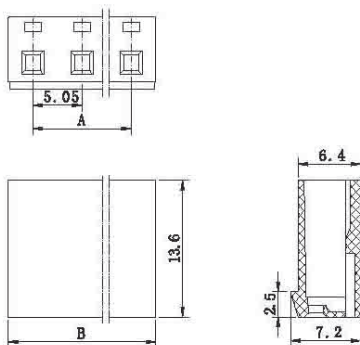

## HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
3	B505001-2-03	10.10	15.20	LH05-03UV
4	B505001-2-04	15.15	20.25	LH05-04UV
5	B505001-2-05	20.20	25.30	LH05-05UV
6	B505001-2-06	25.25	30.35	LH05-06UV
7	B505001-2-07	30.30	35.40	LH05-07UV
8	B505001-2-08	35.35	40.45	LH05-08UV
9	B505001-2-09	40.40	45.50	LH05-09UV
10	B505001-2-10	45.45	50.55	LH05-10UV
11	B505001-2-11	50.50	55.60	LH05-11UV